

# Tire Pressure Monitor System (TPMS) Scan Tool Quick Start Guide



# IMPORTANT NOTICES

## SAFETY DEFINITIONS

All **Danger**, **Warning**, **Important**, and **Note** messages must be followed for your safety. These safety messages are in the following formats:



**DANGER:** Means you may risk possible loss of life.

---



**WARNING:** Means you may risk possible bodily harm.

---

**IMPORTANT:** Means you risk damage to the vehicle or the tool.

*NOTE:* Provide clarity and helpful tips.

These safety messages cover situations SPX is aware of. SPX cannot know, evaluate and advise you as to all of the possible hazards. You must be certain that any conditions or service procedures encountered do not jeopardize your personal safety.

## COPYRIGHT

No part of this manual may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SPX.

Microsoft and Microsoft Windows are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Windows screen-captures may be used for instructional purposes. This document may also include other tradenames and trademarks of SPX Corporation and other companies.

## DISCLAIMER

All information, illustrations, and specifications contained in this technical instruction manual are based on the latest information available at the time of publication. The right is reserved to make changes at any time without obligation to notify any person or organization of such revisions or changes. Further, SPX shall not be liable for errors contained herein or for incidental or consequential damages (including lost profits) in connection with the furnishing, performance or use of this material.

# CONTENTS

<b>IMPORTANT NOTICES</b> .....	<b>inside front cover</b>
<b>CONTENTS</b> .....	<b>i</b>
<b>TPMS Scan Tool Overview</b> .....	<b>1</b>
<b>TPMS Scan Tool Features</b> .....	<b>2</b>
<b>Setup</b> .....	<b>4</b>
Provide Power to Scan Tool .....	4
Adjust Default Settings .....	5
Install the PC Software .....	6
<i>PC Requirements</i> .....	6
<i>Software Installation</i> .....	6
<i>TPMS Scan Tool Updates or New Applications</i> .....	6
<b>User Guide Instructions</b> .....	<b>7</b>
<b>Test Startup and Vehicle Connection</b> .....	<b>8</b>
Step 1: Enter the Vehicle Information .....	8
Step 2: Connect the Cable .....	10
Step 4: Select the Diagnostic Function .....	11
<i>Diagnostic Trouble Codes</i> .....	12
<i>Special Tests</i> .....	12
<i>Datastream</i> .....	12
<i>Custom Datastream</i> .....	12
<i>Quick Reference</i> .....	12
<i>Playback Recorded Files</i> .....	12
<b>Quick Reference</b> .....	<b>13</b>
<b>Playback</b> .....	<b>14</b>
<b>ScanMate TPMS PC Software</b> .....	<b>16</b>
TPMS Scan Tool / PC Connection .....	16
ScanMate TPMS Application Overview .....	17
TPMS Scan Tool Printing Procedure .....	18
<b>SPX Corporation Limited Warranty</b> .....	<b>inside back cover</b>

*This page is intentionally blank.*

---

## TPMS Scan Tool Overview

The TPMS Scan tool is an easy-to use, hand-held tool that lets you quickly look up vehicle TPMS information and reset procedures and perform Tire Pressure Monitor System diagnostics.

With the scan tool properly connected to a vehicle's data link connector (DLC), you can use the scan tool to read TPMS diagnostic trouble codes (DTCs) and view live data readings (datastream) from the vehicle's TPMS-related ECUs. You can also save "recordings" of data readings and perform special TPMS programming and reset procedures.

In addition, with the ScanMate PC software installed in a personal computer (PC), and with the scan tool properly connected to the PC, you can print data from the scan tool and upload recordings to the PC for viewing.

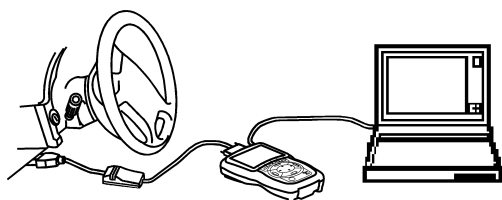


Figure 1: TPMS Scan Tool Connection to Vehicle (and optionally to a PC)

When you turn on the scan tool, the Application Manager screen appears for you to select the software applications in the scan tool as described below.



Figure 2: Application Manager Screen

- **Tire Pressure Monitor** — for diagnostic testing of Tire Pressure Monitor Systems.
- **Quick Reference** — for quickly finding system descriptions, torque specifications, and reset procedures for Tire Pressure Monitor Systems.
- **System Setup** — for adjusting default settings for the TPMS Scan tool.
- **Playback** — for viewing saved recordings.

## TPMS Scan Tool Features

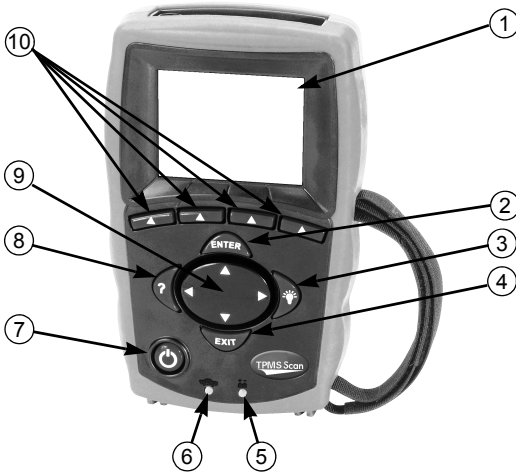


Figure 3: TPMS Scan Tool Front View

- 1 LCD Screen** — displays the menus and data screens.
- 2 ENTER Key** — executes a selected menu option and generally displays the next screen.
- 3 LIGHT Key** — turns the LCD backlight on when using internal battery power. (When using external power, the backlight is always on when the tool is on.)
- 4 EXIT Key** — exits a screen and generally displays the previous screen.
- 5 External Power Indicator** — indicates when the scan tool is drawing power from a source other than the internal batteries, such as from a Smart Cable vehicle cable connection or an optional cigarette lighter power adapter or optional AC / DC power adapter.
- 6 Communication Indicator** — indicates when the scan tool is properly connected and communicating with the vehicle's ECU.
- 7 On / Off Button** — turns the scan tool on and off. When using external power, the scan tool stays on until you turn it off. When using internal battery power, the scan tool turns off automatically after a set time (see Unit Defaults in **Adjust Default Settings** on page 5).
- 8 HELP Key** — displays helpful information.
- 9 Arrow Keys (Up, Down, Left, and Right)** — select a menu option or scroll through a screen of data or text.
- 10 Variable Function Keys** — four keys that correspond with “buttons” on some screens; execute special commands.

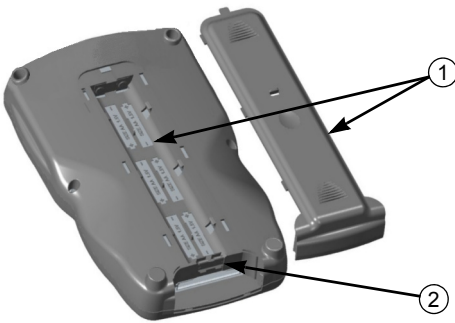


Figure 4: TPMS Scan Tool Back View

- 1 **Battery Compartment and Cover** — holds six (6) 1.5 volt batteries.
- 2 **Flash Card Port** — holds a flash card (future use).

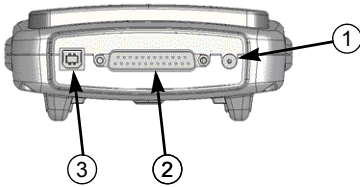


Figure 5: TPMS Scan Tool Top View

- 1 **External Power Port** —connects the power adapter.
- 2 **DB25-Pin Port** — connects the vehicle DLC cable.
- 3 **USB Port** — connects a USB cable for connecting to a PC.

# Setup

Setup includes providing power to the scan tool, adjusting default settings, and installing the ScanMate TPMS PC software and the *TPMS Scan Tool User Guide*.

## Provide Power to Scan Tool



Figure 6: Batteries

Before using the TPMS Scan tool, provide power from six (6) internal 1.5 volt batteries. (After you start vehicle diagnosis, the OBD II cable connection provides external power to the scan tool.)

- The 1.5 volt batteries can be either alkaline or rechargeable nickel metal hydride (NiMH) batteries. Insert the batteries into the battery compartment on the back side of the scan tool.

**IMPORTANT:** Use only high-quality batteries. During long periods of storage, remove the batteries to prevent damage from battery leakage.

- An optional cigarette lighter power adapter and/or optional AC / DC power adapter are available for connecting the scan tool directly to the vehicle's battery or to an electrical outlet. For details, refer to **Appendix A: Accessory Components** in the *User Guide*.

**IMPORTANT:** To conserve internal battery life, use either the OBD II cable connection or a power adapter as the scan tool's primary power source; do not use the internal batteries as the primary power source. Use the internal batteries only when adjusting default scan tool settings, during test startup (for vehicle identification), or when uploading files to the ScanMate TPMS software on a PC. In addition, use the backlight in poorly-lit conditions only.

## Adjust Default Settings

The System Setup functions let you view information about the scan tool and adjust default settings for the scan tool as follows:

- 1 Press the **On / Off** button to turn the TPMS Scan tool on; wait for the Application Manager screen to appear.

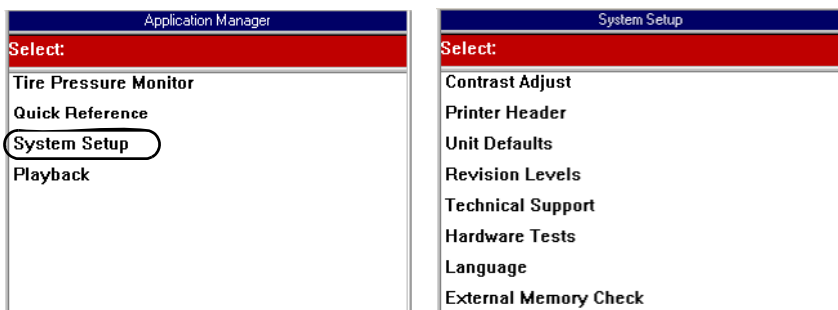


Figure 7: Application Manager Screen and System Setup Screen

- 2 Use the **Down Arrow** key to select **System Setup** and then press the **ENTER** key. This displays the System Setup screen, shown above.
- 3 Use the **Down Arrow** key to select an item to adjust (described below) and then press the **ENTER** key.
  - **Contrast Adjust** — adjust the contrast of the LCD screen.
  - **Printer Header** — set up a heading for reports that you print from the scan tool.
  - **Unit Defaults** — set the date, time, units-of-measure, and automatic shut down time. It also lets you turn the audible beep and printer header functions on or off.
  - **Revision Levels** — display software version numbers.
  - **Technical Support** — display technical support information.
  - **Hardware Tests** — test the LCD screen, keypad keys, and beeper; view the time clock and serial number for the scan tool.
  - **Language** — set the default language for the TPMS Scan tool software.
  - **External Memory Check** — check the system files on a compact flash card in the compact flash port.
- 4 Follow any on-screen instructions; use the **Arrow** keys as needed to adjust settings; use the **EXIT** key to exit the screens. For detailed instructions, refer to the *User Guide*.

### Install the PC Software

The ScanMate TPMS CD installs the software and *User Guide* on a personal computer (PC).


#### **PC Requirements**

The PC should have the following minimum requirements:

- Microprocessor: 233 MHz Pentium, minimum
- RAM: 128 MB, minimum (256 MB recommended)
- Hard Disk (C drive): 20 MB free space, minimum
- PC Communication Port: USB
- Display (Monitor): Color, set at 800 x 600 pixel, minimum
- Operating System: Microsoft® Windows XP® (updated with service pack 2) or Microsoft® Windows Vista®
- Internet Browser: Microsoft Internet Explorer 5.0 or newer

#### **Software Installation**

Use the following steps to install the software.

- 1 Insert the ScanMate TPMS CD in your PC's CD drive and follow the on-screen instructions. Be aware of the following:
  - The install software uses Windows auto-play technology. If the instructions do not appear automatically, press the Windows logo key and the R key at the same time (  +R). This displays a Run (or Open) dialog box. Click the Browse button and then find and select your CD drive. After this, select the Setup.exe file and click the Open button (or OK). Then click the OK button in the Run dialog box.
  - The installation places a ScanMate TPMS icon on the Windows desktop and places the ScanMate TPMS option on the Windows Start, Programs menu. You can use either one of these to start the software application. Refer to **ScanMate TPMS PC Software** on page 16.
  - The installation places a *User Guide* icon on the Windows desktop. You use this icon to open the User Guide. Refer to **User Guide Instructions** on the next page.
- 2 When the installation is finished, remove the CD from the PC's CD drive.

#### **TPMS Scan Tool Updates or New Applications**

To obtain scan tool updates or new applications, contact your local distributor. Update kits will include a memory card and complete installation instructions.

## User Guide Instructions

The *User Guide* provides complete operating instructions for the TPMS Scan tool. It is provided as a portable document format (pdf) file that installs on the PC during the ScanMate TPMS Software installation (see the previous page).

To open the *User Guide*, double-click the Windows desktop icon. This displays the *Select User Guide* window, shown below.

**Note:** If the *User Guide* does not open, the Acrobat Reader software application may not be installed on the PC. To install Acrobat Reader, visit the following website: [http://www.adobe.com/products/acrobat/readstep2\\_allversions.html](http://www.adobe.com/products/acrobat/readstep2_allversions.html).



Figure 8: Select User Guide Window

From the *Select User Guide* window, click *Scan Tool* to open the *User Guide* in an Adobe® Acrobat Reader® window.

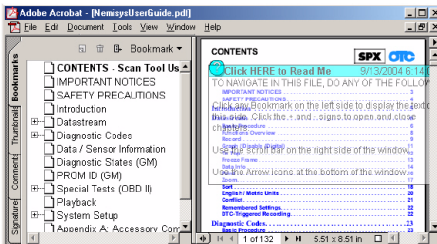


Figure 9: TPMS Scan Tool User Guide Windows

The *User Guide* window, shown above, contains a Table of Contents (TOC) in the left pane. You click a topic in the TOC to display its contents in the right pane of the window. You can right-click inside these the right pane to display a navigation menu. You can also print the *User Guide*. For help using the file, select Help, Adobe Reader Help from the main menu (or press F1 on the keyboard) .

### Test Startup and Vehicle Connection

For Tire Pressure Monitor functions, the TPMS Scan tool must be connected to a vehicle with the Smart cable. You first enter the vehicle information into the tool to identify the vehicle and then connect the cable and continue with the vehicle diagnostics.

**Note:** *This manual provides instructions in the order listed above, but you may optionally connect the cable first and then enter the vehicle information.*



#### WARNING:

Before performing any diagnostic functions, refer to the Safety Precautions and instructions provided in the *User Guide* and the warnings provided by the vehicle manufacturer. In addition, follow any warnings and descriptions provided on the scan tool screens.

---

### Step 1: Enter the Vehicle Information

- 1 Press the **On / Off** button to turn on the scan tool; wait for the Application Manager screen to appear.


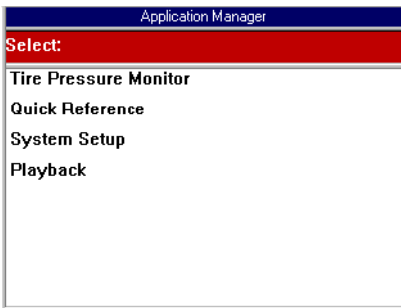


Figure 10: Application Manager Screen

- 2 Select **Tire Pressure Monitor** and press the **ENTER** key. A series of Vehicle Identification screens appears for you to identify the vehicle.

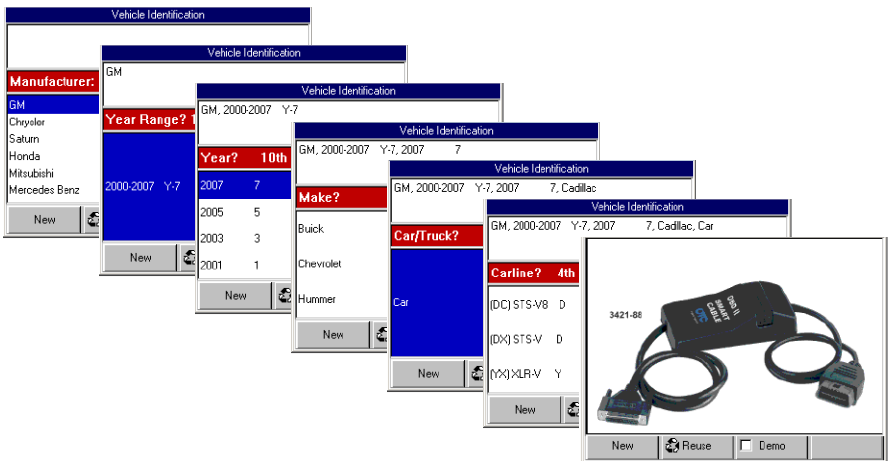

**Figure 11: Series of Vehicle Identification Screens**

**3** Do any of the following on the Vehicle Identification screens:

- On each screen that appears, use the **Arrow** keys to select the correct option and then press the **ENTER** key. Do this until the vehicle is completely identified and the Required Cables illustration appears. Then go to step **4**.
- To move backward through the screens, one at a time, use the **EXIT** key.
- To return to the first Vehicle Identification screen and start over, press the function key that corresponds to the **New** button.
- To reuse information saved for a vehicle already tested, press the function key that corresponds to the **Reuse** button. This displays the Reuse Vehicles screen. Use the **Up and Down Arrow** keys to select a vehicle description and then press the **ENTER** key. This displays the Required Cables illustration. Go to step **4**.

**Note:** The Reuse Vehicles list holds five (5) descriptions. When full, old descriptions delete as you enter new ones. To prevent a description from deleting, select it and press the **Save** function key. This places a disk icon by the description. (Use the **Delete** function key to delete a selected description.)

- To display demonstration data in the software, press the function key that corresponds to the **Demo** button. A checkmark in the box indicates the Demo function is on (press the key again to turn the function off).

**4** With the Required Cables screen displayed on the scan tool (Figure 11), continue with **Step 2: Connect the Cable** on page 10.

### Step 2: Connect the Cable

**IMPORTANT:** Make sure you have correctly entered the vehicle information in the scan tool; incorrect vehicle identification can produce unexpected test results (see **Step 1: Enter the Vehicle Information** on page 8).

**Note:** Leave the Required Cables screen displayed on the scan tool. Do not turn off the scan tool.

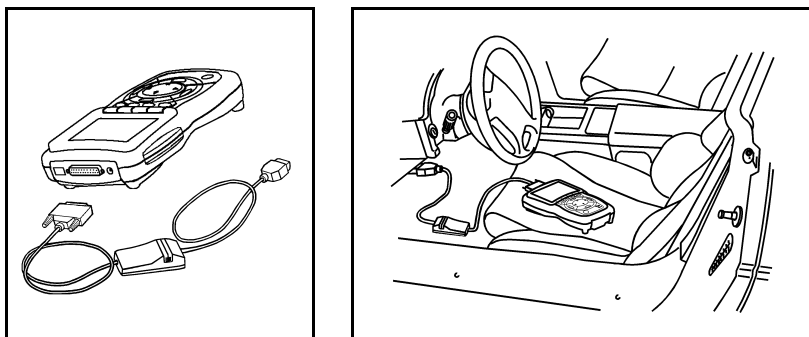


Figure 12: Cable Connection to Scan Tool and Vehicle DLC

- 1 Connect the Smart cable's 25-pin connector to the DB25-pin port on the top of the scan tool and connect the J1962 connector to the vehicle's DLC, as shown above.

**Note:** The vehicle's DLC is not always located under the dash as shown.

- 2 Place the vehicle's ignition key in the On (or Run) position. Do not start the engine.

**Note:** If the external power indicator (🔌) on the scan tool is not lit, make sure the cable is connected securely.

- 3 With the Required Cables illustration still displayed on the scan tool, press the **ENTER** key. This initiates communication with the vehicle's computer and displays the next screen.

**Note:** If the communication indicator (🚗) on the scan tool is not lit, check the cable connection.

## Step 4: Select the Diagnostic Function

After you connect the cable and press the ENTER key on the scan tool, use the following steps to select a diagnostic function.

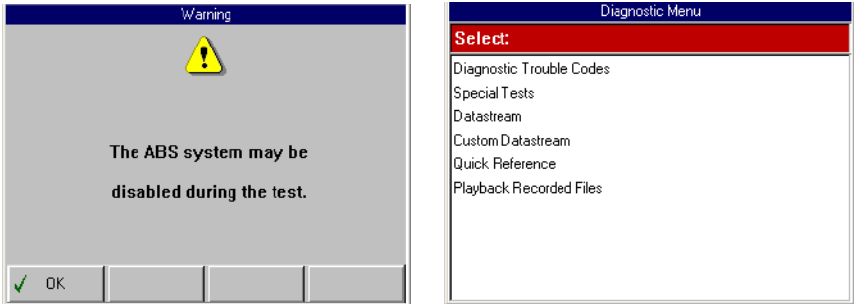


Figure 13: Message Screen and Diagnostic Menu Screen

1 If one or more Message (Warning) screens appear, follow the on-screen instructions or press the **ENTER** key to continue. Do this until the Diagnostic Menu screen appears, as shown above.

2 Select a **diagnostic function** and press the **ENTER** key.

**Note:** The Diagnostic Menu screen shown above is only an example that shows all possible options. During testing, only the options available for the vehicle and ECU being tested will appear on this screen.

3 Refer to the brief descriptions on the next page. For detailed instructions, refer to the **User Guide**.

### ***Diagnostic Trouble Codes***

The Diagnostics Trouble Codes functions let you read, review, and clear TPMS-related diagnostic trouble codes (DTCs) from a selected ECU.

### ***Special Tests***

The Special Tests functions let you program and reset TPMS-related components (such as sensors).

### ***Datastream***

The Datastream function lets you view TPMS-related data readings from a selected ECU. With the Datastream screen displayed, you can view the data in an LED or graphical format, record and save files for later viewing, sort the data, pause the readings and view past data, print the data, and more.

### ***Custom Datastream***

The Custom Datastream function lets you select and view TPMS-related data readings for specific components (sensors, switches, etc.) controlled by a specific ECU.

### ***Quick Reference***

The Quick Reference function lets you view system descriptions, torque specifications, and reset procedures for Tire Pressure Monitor Systems. This option is also available on the Application Manager menu screen, as described on the next page.

### ***Playback Recorded Files***

The Playback Recorded Files function lets you view previously recorded data files. This option is also available on the Application Manager menu screen, as described on page 14.

## Quick Reference

The Quick Reference function lets you quickly view TPMS descriptions, torque specifications, and reset procedures.

- 1 Make sure the scan tool has power (batteries installed is sufficient but you may want to connect optional external power to conserve battery life).

**Note:** *The scan tool does not have to be connected to a vehicle.*

- 2 Press the **On / Off** button to turn on the scan tool; wait for the Application Manager screen to appear.

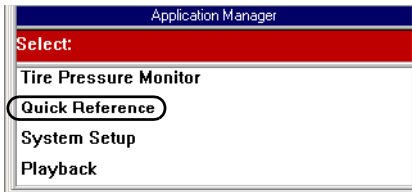


Figure 14: Application Manager Screen

- 3 Select **Quick Reference** and press the **ENTER** key. A series of screens appears for you to identify the vehicle and the procedures to view.

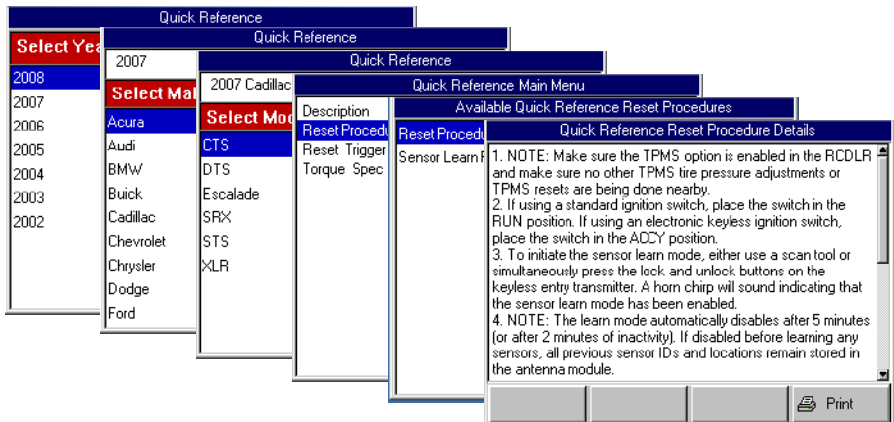


Figure 15: Series of Selection Screens

- 4 On each screen that appears, use the **Arrow** keys to select the correct option and then press the **ENTER** key. Do this until the vehicle is completely identified and the Quick Reference information or procedure screen appears, as shown above.

**Note:** *To move backward through the screens, use the **EXIT** key.*

- 5 View, and optionally print, the data as necessary. Refer to **TPMS Scan Tool Printing Procedure** on page 18.
- 6 When finished, use the **EXIT** key to return to previous screens.

# Playback

The Playback function lets you view data recorded with the Datastream Record function (see the **User Guide** for details). It also lets you save and delete recorded files.

**Note:** You can also upload and view recorded data files on a PC. For details, refer to **ScanMate TPMS PC Software** on page 16.

- 1 Make sure the TPMS Scan tool has power (batteries installed is sufficient but you may want to connect optional external power to conserve battery life).

**Note:** The TPMS Scan tool does not have to be connected to a vehicle.

- 2 Press the **On / Off** button to turn the TPMS Scan tool on; wait for the Application Manager screen to appear.

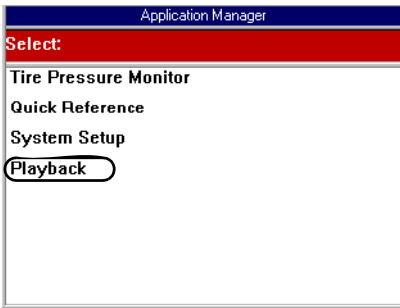


Figure 16: Application Manager Screen

- 3 Select **Playback** and press the **ENTER** key. This displays the Events to Playback screen (Figure 17 on page 15).

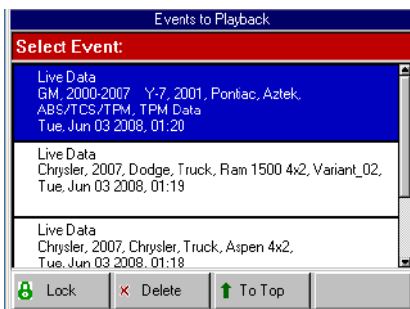


Figure 17: Events to Playback Screen

- 4 **Select the recorded event** to view and press the **ENTER** key. (The events are identified by the vehicle description, date, and time of the recording.) This displays the recorded Event in the Playback screen.

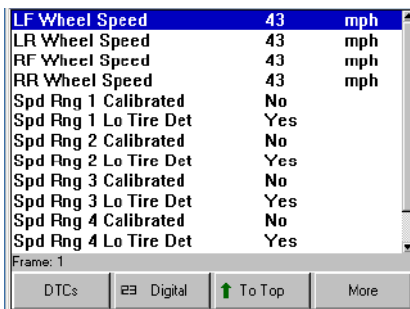


Figure 18: Playback Screen

- 5 Use the **Arrow** keys to view the data. When you use the **Left** and **Right Arrow** keys, the Frame number in the status line changes as you move through the recording.
- 6 Optionally, use the function keys to display lines as graphs, move lines to the top of the screen, print the data, magnify the view of lines, or sort the lines.
 

***Note:** For additional information about the screens and function buttons, refer to the User Guide.*
- 7 When finished, use the **EXIT** key to exit the screen.


## ScanMate TPMS PC Software

The ScanMate TPMS software application lets you print data and upload recorded files using a personal computer (PC).

A special feature of the ScanMate TPMS application is the variety of methods for viewing playback data. You can view data as gauges, block graphs, or bar graphs; you can add cursors and markers; and you can export files as text files or bitmaps (and even send them by email to Vehicle Diagnostic Help Services).

### TPMS Scan Tool / PC Connection

To use the ScanMate TPMS application for printing data directly from the TPMS Scan tool or for uploading recorded files from the TPMS Scan tool, connect the TPMS Scan tool and the PC with a USB cable.

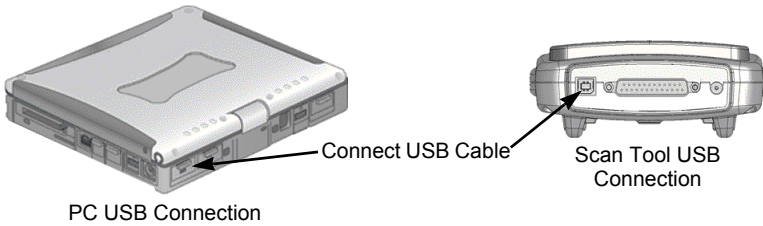

**Figure 19: TPMS Scan Tool Connection to PC**

## ScanMate TPMS Application Overview

To start the ScanMate application, click the Windows desktop icon or select ScanMate from the Windows Start menu. The first window that appears is the ScanMate main window. This window has function buttons at the top for accessing the software functions. They include the following:

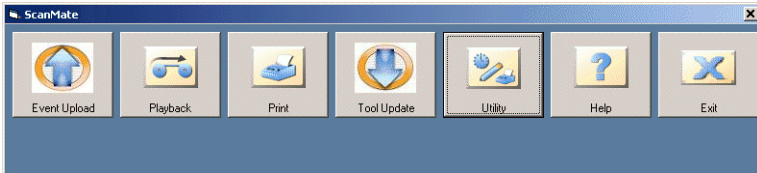



Figure 20: ScanMate Main Window

	<p><b>Event Upload</b> — checks for a TPMS Scan tool connection, looks for saved playback files on the scan tool, uploads the playback files to the PC, and then displays a dialog box for you to open a playback file for viewing.</p> <p><b>Note:</b> <i>To upload playback files, disconnect the scan tool from the vehicle.</i></p>
	<p><b>Playback</b> — displays a dialog box for you to select a playback file to open. After you select a file, it opens in a separate Playback window. You can review, save, or delete the playback file.</p> <p><b>Note:</b> <i>To view playback files on the PC, you must first upload the files with the Event Upload function. Then, to playback and print the uploaded files, you do not have to connect the scan tool and PC.</i></p>
	<p><b>TPMS Scan Tool Print</b> — displays a dialog box for you to print data directly from the TPMS Scan tool. This can be live data you are viewing or it can be playback data saved in the scan tool. (See the procedure on the next page.)</p>
	<p><b>Tool Update</b> — for future use.</p>
	<p><b>Utility</b> — displays a window for you to enter shop information, change the software language, and view software information.</p>
	<p><b>Help</b> — displays the ScanMate TPMS Help System window.</p>
	<p><b>Exit</b> — closes the application.</p>

For step-by-step instructions, start the ScanMate TPMS application and click the **Help** button. (For special TPMS Scan tool printing instructions, see the next page.)

## TPMS Scan Tool Printing Procedure

To print data directly from the TPMS Scan tool, the scan tool must be connected to a PC that has the ScanMate TPMS software installed and prepared for printing. Use the following steps as a reference for printing. For detailed instructions use the ScanMate TPMS application's Help System.

- 1 Make sure the TPMS Scan tool is connected to the PC. For details, refer to **TPMS Scan Tool / PC Connection** on page 16.
- 2 Start the ScanMate TPMS application on the PC.
- 3 On the ScanMate TPMS main window, click the **Print**  button. This displays the ScanMate TPMS Print dialog box.

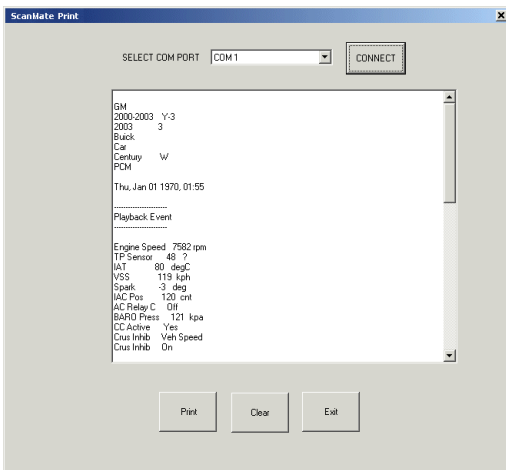


Figure 21: ScanMate TPMS Print Dialog Box

- 4 In the ScanMate TPMS Print dialog box, do the following:
  - a Select the COM port for the TPMS Scan tool connection and click the **CONNECT** button.
  - b Check the display area. If it contains data you do not want to print, click the **Clear** button.
- 5 On the TPMS Scan tool, display the data to print and press the **Print** key. This uploads the data to the display area in the ScanMate TPMS Print dialog box on the PC.
- 6 In the ScanMate TPMS Print dialog box, view the data and click the **Print** button to print the data to the PC's default printer.

**Note:** The TPMS Scan tool header prints on all reports. For details, refer to **Adjust Default Settings** on page 5.

## **SPX Corporation Limited Warranty**

**THIS WARRANTY IS EXPRESSLY LIMITED TO ORIGINAL RETAIL BUYERS OF SPX ELECTRONIC DIAGNOSTIC TOOLS (“UNITS”).**

- **New SPX Units** are warranted against defects in materials and workmanship for three years (36 months) from date of delivery.
- **Refurbished SPX Units** are warranted against defects in materials and workmanship for one year (12 months) from date of delivery
- **Cables and Accessories** are warranted against defects in materials and workmanship for one year (12 months) from date of delivery

*This warranty does not cover any Unit that has been abused, altered, used for a purpose other than that for which it was intended, or used in a manner inconsistent with instructions regarding use. The sole and exclusive remedy for any Unit found to be defective is repair or replacement, at the option of SPX. In no event shall SPX be liable for any direct, indirect, special, incidental or consequential damages (including lost profit) whether based on warranty, contract, tort or any other legal theory. The existence of a defect shall be determined by SPX in accordance with procedures established by SPX. This warranty does not cover the AA batteries included in the kit. No one is authorized to make any statement or representation altering the terms of this warranty.*

### **DISCLAIMER**

**THE ABOVE WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

### **SOFTWARE**

Unit software is proprietary, confidential information protected under copyright law. Users have no right in or title to Unit software other than a limited right of use revocable by SPX. Unit software may not be transferred or disclosed without the written consent of SPX. Unit software may not be copied except in ordinary backup procedures.

### **ORDER INFORMATION**

Order replacement and optional parts directly from your SPX authorized tool supplier. Include the quantity, part number, and item description.

### **Technical Service**

If you have any questions about the operation of the product, call (800) 533-6127.

### **Repair Service**

When sending your SPX electronic product in for repair, include the following:

- contact name
- telephone number
- description of the problem
- proof-of-purchase for warranty repairs
- preferred method of payment for non-warranty repairs

*For non-warranty repairs, you can make payment with Visa, Master Card, or with approved credit terms. To receive a credit application, fax your request to the Credit Department at 800-962-8734.*

Send the unit to:  
SPX Service Solutions  
RGA: Repair Dept.  
2100 Park Drive  
Owatonna, MN 55060-0994



**SERVICE SOLUTIONS**

©2008 SPX Corporation. All rights reserved  
06/11/08 Part Number **548179-ENG**

655 EISENHOWER DRIVE  
OWATONNA, MN 55060-0995 USA  
TELEPHONE 507-455-7000  
CUSTOMER SERVICE 800-533-6127  
FAX 800-283-8665  
TECH SERVICES 800-533-6127  
FAX 800-955-8329